

(19) World Intellectual Property
Organization
International Bureau



534 030


(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/041041 A1

- (51) International Patent Classification⁷: **A47J 37/06**, 37/07
- (21) International Application Number:
PCT/GB2003/004807
- (22) International Filing Date:
6 November 2003 (06.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0225906.7 6 November 2002 (06.11.2002) GB
- (71) Applicants and
(72) Inventors: **WORTON, Ian, Geoffrey** [GB/GB]; 26 Shire Ridge, Walsall Wood, Walsall WS9 9RB (GB). **NEATH, Peter, Karl** [GB/GB]; 98 Birmingham Road, Alkrige, Walsall WS9 0AZ (GB).
- (74) Agent: **BADGER, John, Raymond**; 6 Simpson Road, Sutton Coldfield, West Midlands B72 1EP (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HEATING RACK

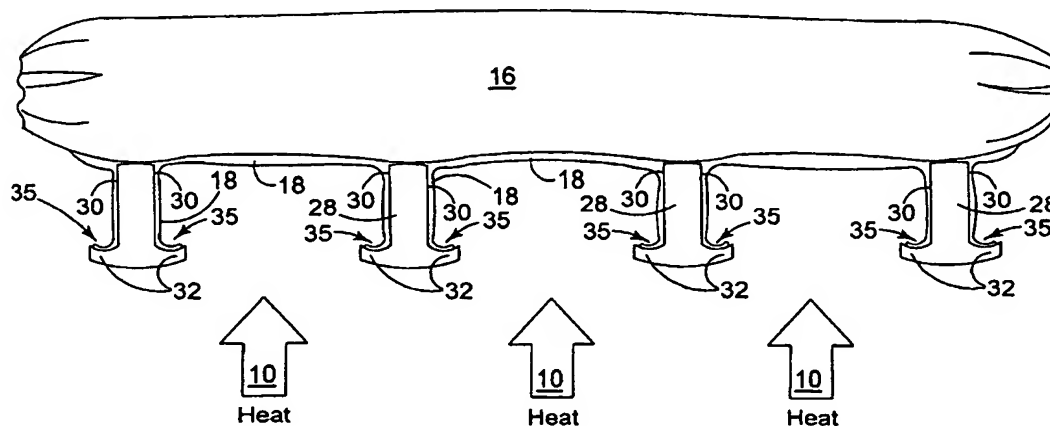

(57) Abstract: A heating rack comprising a plurality of spaced discrete elongate members (26) which an object (16) to be heated is placed and exposed to a source of heat. Each member (26) having a main body (28) with two side faces (30) that, in use, extend in a vertical direction and along the member (26), and a side member (32) located at the lowermost extremity of each side face (30). Each side member is shaped, positioned, and arranged, relative to its respective side face (30) so that, in use, liquid from the object (16) when it is heated is induced to run down each side face (30) due to surface tension effects and is collected by each side member (32) and directed in a direction along each side member (32) to a collection region at one or both ends of the members (26).